GRSX4200M2

DDR2-667, PC2-5300, Registered, ECC, 1.8V, 240-pin DIMMs

Products in Family

GRSX4200M2S/4GB (2 x 2GB 1Rx4 DIMMs)
GRSX4200M2/8GB (2 x 4GB 2Rx4 DIMMs)
GRSX4200M2/16GB (2 x 8GB 4Rx4 DIMMs)
GRSX4200M2D/16GB (2 x 8GB 2Rx4 DIMMs)

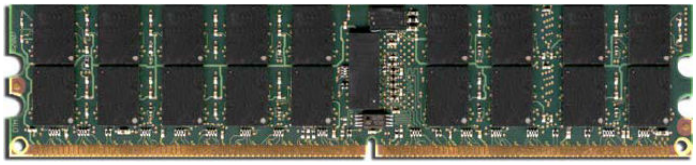

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (5.25”X1.181”) Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage 1.8V Fully RoHS Compliant	Each GRSX4200M2 upgrade consists of a matched pair of two DDR2-667 Registered DIMMs with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
GRSX4200M2S/4GB	X4226A-C	Sun Fire x4100M2, Sun Fire X4200 M2, Netra x4200 M2
GRSX4200M2/8GB	X4227A-Z, X4233A	
GRSX4200M2/16GB	Not Offered by Sun	
GRSX4200M2D/16GB	Not Offered by Sun	*Note: The 16GB upgrades are not compatible with the Netra x4200 M2.*

Front view

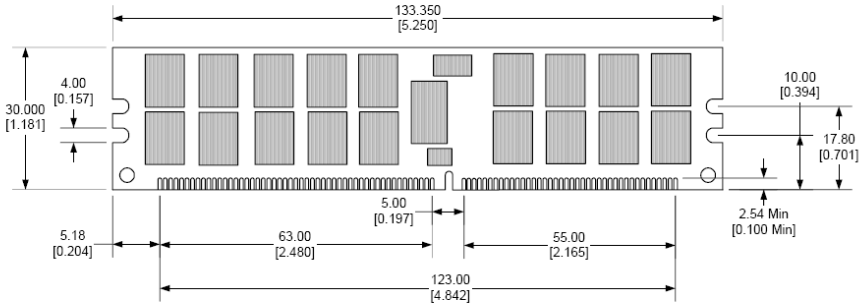

Back view

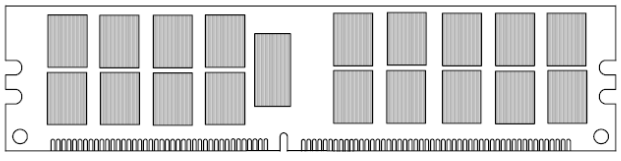

Side view



Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters

Copyright © 2011 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.